



Industrial Acoustic Hood - 23dB
Accessories



- Suitable for use with GAI-Tronics telephones, Page/Party® equipment and Elemecplus external access panels
- Glass fibre Reinforced Plastic laminate construction
- 23dB Mean noise reduction
- Polypropylene interior
- 50mm acoustic lining panels
- Internal gear plate for ease of equipment mounting – optional sizes
- Up to 60kgs of equipment can be carried
- Detachable internal shelf
- External mounting straps
- Fire retardant

Accessories

Industrial Acoustic Hood - 23dB Accessories

TECHNICAL SPECIFICATIONS

Body Material -

Main Body and Detachable Shelf:

General purpose resin continuous filament MAT

Acoustic Damping:

Insulation - Rockwool RW3, Density 60kg/m3 (50mm)

Acoustic Facing:

Internal Lining - White perforated PPC, 3mm thickness.

Fire Resistance:

BS476 Part 7 Fire Retardant Classification of 1

Telephone Mounting Plate:

304 Grade Stainless Steel with White Gloss Epoxy

Polyester Powder finish, or

316 (Marine) Grade Stainless Steel option

Mounting Straps:

Galvanised Steel - Standard

Stainless Steel - Option

Colour:

Yellow or red as standard. Other options available

Weight:

Approx 25 kg


ORDER CODE

	Mounting Plate: Stainless Steel (304)	Mounting Plate: Stainless Steel (316)	Mounting Straps: Galvanised Steel	Mounting Straps: Stainless Steel (316)	Internal Shelf
To be used with Auteldac 4 telephones and Page/Party® units					
988-60-0002-00*	✓		✓		✓
988-60-0002-10*	✓			✓	✓
988-60-0002-20*		✓		✓	✓
Larger gear plate: To be used with Drillers Intercom stations, SMART Series Page/Party® units and Elemecplus external access panels					
988-60-0002-50*		✓		✓	✓
988-60-0002-60*		✓	✓		✓

* colour	yellow	red	blue	grey	orange
	1	2	3	4	5

DIMENSIONS

- H 920 x W 690 x D 600 mm
- Fixing: W 740 x H 575 mm
- Gear plate for 00*, 10* and 20* versions:
W220mm x H400mm
- Gear plate for 50* and 60* versions:
W426mm x H610mm

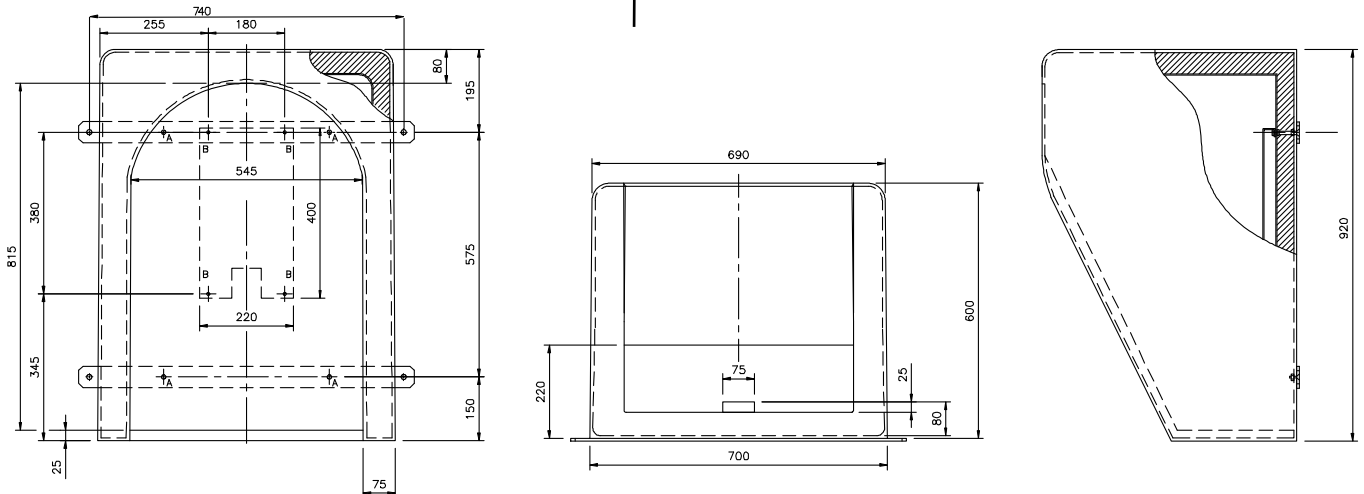

(Gear plate dimensions shown on this diagram are for 00*, 10* and 20* versions)



GAI-Tronics® - United Kingdom - Tel: +44 (0)1283 500500 - Fax: +44 (0)1283 500400 - www.gai-tronics.co.uk
 GAI-Tronics® (Corporate) - USA - Tel: +1(610) 777 1374 - Toll Free: 800 492 1212 - Fax: +1(610) 796 5954 - www.gai-tronics.com
 GAI-Tronics® S.r.l. - Italy - Tel: +39 02 48601 460 - Fax: +39 02 4585 625 - www.gai-tronics.co.uk
 GAI-Tronics® - Malaysia - Tel: +60 3 8945 4035 - Fax: +60 3 8945 4675 - www.gai-tronics.co.uk
 GAI-Tronics® Ausdtdac - Australia - Tel: 011 61 28 851 5000 - Fax: 011 61 29 899 2490 - www.austdtdac.com.au
 An ISO 9001, ISO 14001, OHSAS 18001 Registered Company
 The policy of GAI-Tronics is one of continuous improvement; therefore the company reserves the right to change specifications without notice.